


## Ball Type Duplex Basket Strainer

# Model 53BTX



- Sizes 3/4" to 4"
- Iron, Bronze, Carbon Steel, or Stainless Steel
- Threaded or Flanged

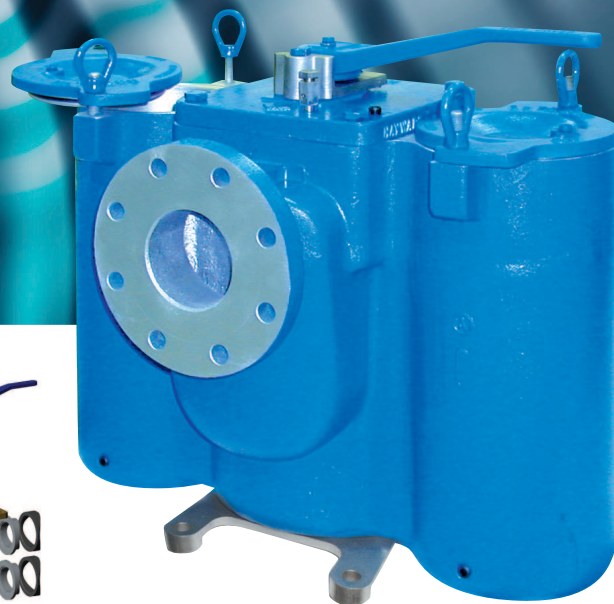


Unique diverter cartridge assures leak-tight isolation of basket chamber during cleaning.

A double sealing system on the upper and lower stems guards against any possible leakage. If service becomes necessary, just remove four bolts and the cartridge slides right out the top of the strainer body.

### FEATURES

- Dynamic sealing design for long life
- Easy-to-operate lever handle—no gear box required
- Unique seat and seal design requires no adjustments
- Teflon® seats for longer service life
- Foot pads for rock solid installation
- Double-stem O-rings for positive sealing
- Easy to access body vent valve
- Side drain plugs on each basket well
- Piston seal strainer basket cover
- Easy access for diverter cartridge removal
- 316 stainless steel ball design



# EATON

Powering Business Worldwide

### Continuous Operation

Eaton's model 53BTX duplex basket strainer can operate continuously, eliminating the need to shut down processes for cleaning of strainers. When the first basket is full, a unique flow diverter cartridge shifts flow to a second basket to permit removal and cleaning with no interruption to operations.

Draining this chamber is easy; the cover lifts and swings clear of the chamber opening with no special tools required.

The unique flow diverter cartridge prevents fluid bypass into the out-of-service chamber. It features a dynamic sealing system that ensures exceptionally long seat life and positive sealing. Manual internal or external ball support adjustments are not necessary.

### Size and Material

The compact, low-profile Model 53BTX fits into spaces ordinary strainers may not, yet it still uses full-size strainer baskets with a low-pressure drop performance. Eaton offers basket openings from 3/4" down to 45 microns. Type 316 stainless steel is standard and Monel or Hastelloy C materials are optional.

### East Basket Servicing

One drain plug is on each side of the basket. Additionally, an easy to access vent valve is on top of each basket well cover. Standard foot mounting pads ensure a rock solid installation no matter where the strainer operates.

### Available options include:

- Differential pressure gauges, with or without switches
- Magnetic separators installed in the strainer basket for removing fine ferrous particulate matter from the process media



# MODEL 53BTX Ball Type Duplex Basket Strainer

Selection Table



| Size                                 | Body & Cartridge Material | End Connection | Seat/Seal    | Diverter Balls  | Pressure Rating PSIG @ 150°F |
|--------------------------------------|---------------------------|----------------|--------------|-----------------|------------------------------|
| 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2" | Iron                      | Threaded       | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2" | Bronze                    | Threaded       | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 3/4", 1", 1-1/4", 1-1/2", 2"         | Carbon Steel              | Threaded       | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 3/4", 1", 1-1/4", 1-1/2", 2"         | Stainless Steel           | Threaded       | TFE/ Viton®  | Stainless Steel | 200 psi @ 150°F              |
| 1", 1-1/2", 2", 2-1/2", 3", 4"       | Iron                      | Flanged 125#   | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 1", 1-1/2", 2", 2-1/2", 3", 4"       | Bronze                    | Flanged 150#   | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 1", 1-1/2", 2", 2-1/2", 3", 4"       | Carbon Steel              | Flanged 150#   | TFE/ Buna-N* | Stainless Steel | 200 psi @ 150°F              |
| 1", 1-1/2", 2", 2-1/2", 3", 4"       | Stainless Steel           | Flanged 150#   | TFE/ Viton®  | Stainless Steel | 200 psi @ 150°F              |

\*Viton® standard for SSTL, optional for iron, bronze and carbon steel.



Cv Factors\*

| Size   | Value | Size   | Value |
|--------|-------|--------|-------|
| 3/4"   | 13    | 2"     | 42    |
| 1"     | 13    | 2-1/2" | 65    |
| 1-1/4" | 18    | 3"     | 110   |
| 1-1/2" | 25    | 4"     | 175   |

\* For water with clean, perforated basket

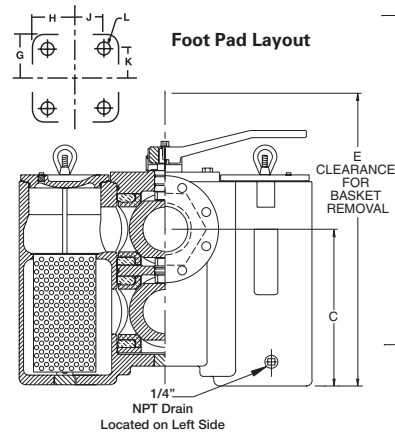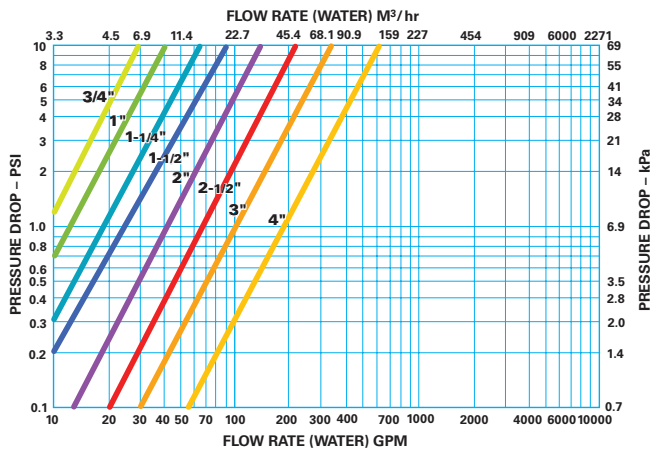

Front View Flanged and Threaded Models

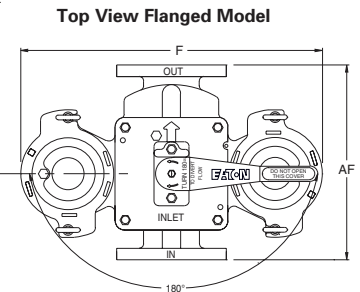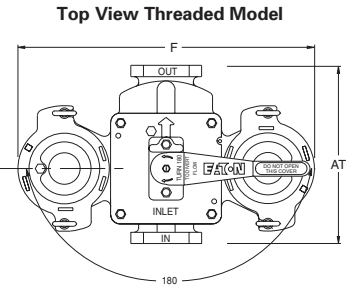

Dimensions (in/mm)

| Pipe Size | AF          | AT          | C           | E           | F           | G          | H          | J         | K          | L   | Weight - Iron Flanged (lb / kg) | Weight - Iron Threaded (lb / kg) | Weight - Bronze Flanged (lb / kg) | Weight - Bronze Threaded (lb / kg) | Weight - Carbon & SS Flanged (lb / kg) | Weight - Carbon & SS Threaded (lb / kg) |
|-----------|-------------|-------------|-------------|-------------|-------------|------------|------------|-----------|------------|-----|---------------------------------|----------------------------------|-----------------------------------|------------------------------------|--|---|
| 3/4       | —           | 5.50 / 140  | 5.00 / 127  | 13.38 / 340 | 10.50 / 268 | 3.25 / 83  | 2.13 / 54  | 1.63 / 41 | 2.75 / 70  | 3/8 | —                               | 37 / 17                          | —                                 | 46 / 21                            | —                                      | 41 / 19                                 |
| 1         | 6.88 / 175  | 5.50 / 140  | 5.00 / 127  | 13.38 / 340 | 10.50 / 268 | 3.25 / 83  | 2.13 / 54  | 1.63 / 41 | 2.75 / 70  | 3/8 | 42 / 19                         | 37 / 17                          | 52 / 24                           | 46 / 21                            | 47 / 21                                | 41 / 19                                 |
| 1-1/4     | 6.88 / 175  | 7.50 / 190  | 6.81 / 173  | 17.00 / 432 | 13.25 / 330 | 3.25 / 83  | 2.13 / 54  | 1.63 / 41 | 2.75 / 70  | 3/8 | —                               | 80 / 36                          | —                                 | 100 / 45                           | —                                      | 89 / 40                                 |
| 1-1/2     | 9.38 / 238  | 7.50 / 190  | 6.81 / 173  | 17.00 / 432 | 13.25 / 330 | 3.25 / 83  | 2.13 / 54  | 1.63 / 41 | 2.75 / 70  | 3/8 | 90 / 41                         | 80 / 36                          | 113 / 51                          | 100 / 45                           | 100 / 45                               | 89 / 40                                 |
| 2         | 10.63 / 270 | 10.00 / 254 | 8.38 / 213  | 21.75 / 552 | 17.38 / 441 | 4.69 / 119 | 2.50 / 64  | 1.81 / 46 | 4.00 / 102 | 5/8 | 167 / 76                        | 157 / 71                         | 209 / 95                          | 197 / 90                           | 185 / 84                               | 174 / 79                                |
| 2-1/2     | 10.75 / 273 | 10.00 / 254 | 8.38 / 213  | 21.75 / 552 | 17.37 / 441 | 4.69 / 119 | 2.50 / 64  | 1.81 / 46 | 4.00 / 102 | 5/8 | 183 / 83                        | 157 / 71                         | 229 / 104                         | 197 / 90                           | 203 / 92                               | —                                       |
| 3         | 13.50 / 343 | —           | 8.88 / 226  | 26.50 / 673 | 22.75 / 578 | 4.69 / 119 | 2.50 / 64  | 1.81 / 46 | 4.00 / 102 | 5/8 | 285 / 129                       | —                                | 357 / 162                         | —                                  | 432 / 196                              | —                                       |
| 4         | 16.00 / 406 | —           | 13.25 / 337 | 33.00 / 838 | 24.75 / 629 | 5.19 / 132 | 3.94 / 100 | 3.25 / 83 | 4.50 / 114 | 5/8 | 389 / 177                       | —                                | 487 / 221                         | —                                  | 432 / 196                              | —                                       |

Dimensions and weights are for reference only. Contact Eaton for certified drawings. Pressure equalizing valve and piping standard on 4" Model 53BTX duplex strainers.

**Eaton**  
**North America — HQ**  
 70 Wood Avenue, South  
 2nd Floor  
 Iselin, NJ 08830  
 Toll Free: (800) 656-3344  
 (North America only)  
 Voice: (732) 767-4200  
 Fax: (952) 906-3706

**Eaton Brazil**  
 Voice: +55 (11) 2465-8822  
**Eaton China**  
 Voice: (86-21) 5866 6161-8000  
**Eaton Europe/Africa/Middle East**  
 Voice: +49-2486-809-0  
**Eaton Singapore**  
 Voice: +65 68251668

©2011 Eaton Corporation. All Rights Reserved. All trademarks and registered trademarks are the property of their respective owners. Litho USA. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

For more information, e-mail us at [filtration@eaton.com](mailto:filtration@eaton.com), or call 732-767-4200.

Visit us online at [filtration.eaton.com](http://filtration.eaton.com) for a complete list of Eaton's filtration products.

**EATON**  
 Powering Business Worldwide



EF-SCPS-09  
 6-2011