

BANDSEAL™ Filter Bag Range



Bag filtration that requires no bag filter housing

Eaton's BANDSEAL filter bags are suitable for low pressure and non-critical open filtration applications.

BANDSEAL monofilament filter bags feature a wide range of retention ratings. They are designed for open surface filtration without a bag filter housing to retain particles that are larger than the respective pore size.

Features and Benefits

- Non-deformable monofilament material is woven into a specific pattern with fusion-welded intersections for extra strength
- All nylon monofilament grades < 125 µm are manufactured with a twill-tape envelope on the side seam and bottom seam
- Drawstring permits installation directly on the end of a pipe or outlet, without an adapter
- Material is free from silicone and crater-forming substances¹

Filter Specifications

Material
Monofilament nylon

Drawstring
Polyester

Retention ratings
25, 50, 80, 100, 125, 150, 200, 250, 300, 400, 600, 800 µm

Dimensions/Parameters

Sizes
01: Ø 7 x 17" L (180 x 430 mm)
43: 5.5 x 12" L (140 x 305 mm)
45: 5.5 x 20" L (140 x 508 mm)

Filter area
01: 2.6 ft² (0.24 m²)
43: 0.9 ft² (0.08 m²)
45: 1.5 ft² (0.14 m²)

Max. operating temperature
374 °F (190 °C)

Max. flow rates²
01: 88 GPM (20 m³/h)
43: 26 GPM (6 m³/h)
45: 53 GPM (12 m³/h)




Powering Business Worldwide

BANDSEAL Filter Bag Range

Retention Ratings

Material	Code	Retention ratings (in µm)												Max. operating temperature °F (°C)	Sizes		
		25	50	80	100	125	150	200	250	300	400	600	800		01	43	45
Nylon monofilament mesh	NMO	■	■	■	■	■	■	■	■	■	■	■	■	374 (190)	■	■	■

Ordering Information

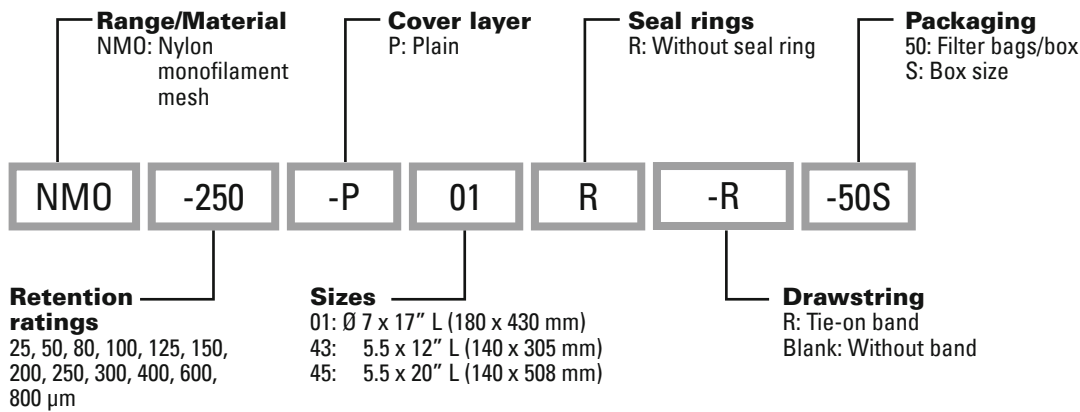

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Internormen Product Line
Friedensstraße 41
68804 Altlufheim, Germany
Tel: +49 6205 2094-0

Begerow Product Line
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore
4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil
Av. Julia Gaioli, 474 – Bonsucesso
07251-500 – Guarulhos, Brazil
Tel: +55 11 2465-8822

**For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration**

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-FTB-11
08-2014